



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ATTORNEY DOCKET NO. 040679/1099



Applicant: Hiromi SHIKATA

Title: METHOD OF RECOGNIZING OBJECT BASED ON PATTERN
MATCHING AND MEDIUM FOR RECORDING COMPUTER
PROGRAM HAVING SAME

Appl. No.: Unassigned

Filing Date: 07/07/2000

Examiner: Unassigned

Art Unit: Unassigned

UTILITY PATENT APPLICATION
TRANSMITTAL

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional
utility patent application of:

Hiromi SHIKATA

Enclosed are:

- ☒ [X] Specification, Claim(s), and Abstract (24 pages).
- ☒ [X] Informal drawings (8 sheets, Figures 1-12).
- ☒ [X] Unsigned Declaration and Power of Attorney (3 pages).
- ☐ [] Assignment of the invention to _____.
- ☐ [] Assignment Recordation Cover Sheet.
- ☐ [] Information Disclosure Statement.
- ☐ [] Form PTO-1449 with copies of ___ listed reference(s).

040679/1099

Appl. No. Unassigned

The filing fee is calculated below:


	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	13	- 20	= 0	x \$18.00	= \$0.00
Independents:	4	- 3	= 1	x \$78.00	= \$78.00
If any Multiple Dependent Claim(s) present:			+	\$260.00	= \$0.00
Surcharge Under 37 C.F.R. 1.16(e)			+	\$130.00	= \$130.00
				SUBTOTAL:	= \$898.00
[] Small Entity Fees Apply (subtract ½ of above):					= \$0.00
				TOTAL FILING FEE:	= \$898.00

- [] A check in the amount of \$_____ to cover the filing fee is enclosed.
- [X] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.
- [] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 19-0741. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 19-0741.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

July 7, 2000
Date

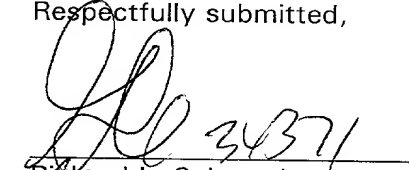
Richard L. Schwaab
Attorney for Applicant
Registration No. 25,479

FOLEY & LARDNER
Washington Harbour
3000 K Street, N.W., Suite 500
Washington, D.C. 20007-5109
Telephone: (202) 672-5414
Facsimile: (202) 672-5399

**METHOD OF RECOGNIZING OBJECT BASED ON PATTERN
MATCHING AND MEDIUM FOR RECORDING COMPUTER
PROGRAM HAVING SAME**

5 **BACKGROUND OF THE INVENTION**

The present invention relates to a technique for recognizing and detecting objects, such as fiducial mark and land, disposed on flat surfaces, such as printed circuit board and screen printing mask, based on pattern matching for positioning, measurement, and inspection.

10 Conventionally, pattern matching using the gray-scale normalized correlation method is often applied to recognition or detection of different objects of regular pattern in various images. This technique for matching a pattern image, i.e. a reference image for pattern matching with a corresponding input image, i.e. an image to be recognized or detected
15 overlays the pattern image on the input image enclosed in a search frame to carry out product sum calculation for each corresponding pixel, obtaining a normalized correlation coefficient value. When calculating the normalized correlation coefficient value, the pattern image is shifted little by little with respect to the input image enclosed in the search frame to obtain
20 its maximum value, i.e. repeated calculation processing is needed for the entire input image.

Conventional pattern matching using the normalized correlation method arises the following inconveniences:

25 1) With measuring apparatus based on pattern matching, fiducial marks, lands, etc. of solder levelers suffer a nonuniform density due to diffused reflection on their surface irregularities even with images subjected to image processing. Thus, when matching a pattern image derived from an original image with a corresponding input image, two images patterns with different nonuniform densities may cause lowered conformity of the
30 density distribution therebetween to reduce a normalized correlation

coefficient value, resulting in unsuccessful pattern matching.

Further, when matching an image of regular pattern with a corresponding input image, a difference in density distribution of the two images, i.e. insufficient similarity of the density distribution therebetween makes pattern matching unsuccessful. This raises a problem of difficult positional detection of a fiducial mark and a land of a solder leveler as shown in FIG. 12.

Furthermore, with conventional pattern matching, when an input image enclosed in a search frame is scanned by a pattern image, product sum processing is repeatedly carried out to obtain a particular normalized correlation coefficient value between the pattern image and the input image, necessitating enormous calculation processing time. Thus, a computer cannot carry out real time processing only with its central processing unit (CPU), requiring an exclusive fast image processing board, resulting not only in restricted development of a specific algorithm, but in increased manufacturing cost due to complex apparatus structure.

2) Conventionally, in order to detect characters such as lot number, original images of the characters are previously stored as pattern images, and are subjected to pattern matching with corresponding input images of the characters. According to this method, if a substrate has shading, circuit sign drawn by silk-white paint (refer hereafter to as silk-white circuit sign), local dirt and the like on the background of an image of a character, a normalized correlation coefficient value between the pattern image and the input image is lowered considerably to disallow detection of the character.

Referring to FIG. 11, when a black lot number is partly printed on a dark-green resist placed on a unwired layout portion of a substrate, contrast cannot fully be obtained between the black character and the dark-green background shading to reach their unification, resulting in unsuccessful recognition of the lot number.

Specifically, since the ensemble of the character and the background is assumed to form one pattern, pattern matching is affected by disturbances produced on the background.

Even with some disturbances produced on the background on an input image, human eyes can recognize a character based on feature information of the foreground of the image. In order to allow detection of characters regardless of disturbed background, a novel method is demanded which ensures pattern matching with regard to only the foreground with the background excluded.

3) For detection of lands, solders, mounted parts and the like of regular pattern, their original images are stored as pattern images, and are subjected to pattern matching with corresponding input images.

If disturbance factors such as wiring layout pattern, silk-white circuit sign, resist and flux exist on the background of pattern images in the vicinity of the lands, solders, etc., the background suffers a nonuniform density or nonuniform and complex density distribution. It is noted that the wiring layout pattern can produce a complex density distribution, and the silk-white circuit sign can cause a greater density peak on the background than that on the foreground. Resist and flux can cause a nonuniform density and variations in density level on the background.

Thus, due to unsuccessful pattern matching on the background, a normalized correlation coefficient value between a pattern image and a corresponding input image is lowered to make pattern detection unsuccessful.

SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a method of recognizing an object based on pattern matching, which allows stable and sure pattern detection with largely shortened processing time,

[illegible]

Generally, the present invention provides a method of
5 recognizing an object based on pattern matching using a gray-scale
normalized correlation method, comprising the steps of:

10 inputting an image of the object, said image including a foreground and a background, said foreground and said background each having a predetermined average value of density distribution;

obtaining a maximum normalized correlation coefficient between said reference image and said input image using said function.

storing a reference image including a foreground, said foreground having a predetermined value of density distribution;

storing a function for giving said predetermined value of
density distribution of said reference image equal to said
30 predetermined average value of density distribution of said input

[illegible]

5 Another aspect of the present invention is to provide a medium for recording a computer program having a method of recognizing an object based on pattern matching using a gray-scale normalized correlation method, the method comprising the steps of:

10

15

20

25

storing a reference image including a foreground, said foreground having a predetermined value of density distribution;

30

storing a function for giving said predetermined value of density distribution of said reference image equal to said predetermined average value of density distribution of said input image; and

- 5 obtaining a maximum normalized correlation coefficient between said reference image and said input image using said function.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing a system for realizing a method of recognizing an object based on pattern matching according to the present invention;

FIG. 2 is a flowchart showing operation of an embodiment with regard to an image of regular pattern;

FIG. 3 is a view similar to FIG. 2, showing operation of the embodiment with regard to an image of arbitrary shape pattern;

FIG. 4 is a view similar to FIG. 3, showing operation of the embodiment with regard to pattern matching;

FIG. 5 is a view similar to FIG. 4, showing another embodiment of the present invention with regard to an image of regular pattern;

FIG. 6 is a view similar to FIG. 5, showing operation of another embodiment with regard to an image of arbitrary shape pattern;

FIG. 7 is a view similar to FIG. 6, showing operation of another embodiment with regard to pattern matching;

FIG. 8A is a schematic plan view showing a pattern image with foreground and background;

FIG. 8B is a graph illustrating a characteristic curve of the density distribution for the pattern image of FIG. 8A;

FIG. 9A is a view similar to FIG. 8A, showing an input image

with foreground and background;

FIG. 9B is a graph illustrating a characteristic curve of the density distribution for the input image of FIG. 9A;

FIG. 10 is a view similar to FIG. 9A, showing a further
5 embodiment of the present invention;

FIG. 11 is a view similar to FIG. 10, showing an input image with shading; and

FIG. 12 is a view similar to FIG. 11, showing fiducial marks of a solder leveler.

10 **DETAILED DESCRIPTION OF THE INVENTION**

Referring to the drawings, preferred embodiments of the present invention will be described in detail.

An essential factor for increasing the detection ability of pattern matching comprises registration of pattern images. The
15 shape of a pattern image as well as the density distribution of the foreground and background thereof is the key for increasing conformity of pattern matching between a pattern image and a corresponding input image.

According to the equation of definition of the normalized
20 correlation coefficient C_r , achievement of high conformity ($C_r \approx 1$) requires that the shape and area or size of the foreground of a pattern image, i.e. a reference image for pattern matching are substantially equal to those of the foreground of a corresponding input image, i.e. an image to be recognized or detected. In this
25 connection, refer to the relation between images as shown in FIGS. 8A and 9A.

With regard to the density distribution, only similarity is needed between the foreground and the background of a pattern image and those of a corresponding input image. In this connection,
30 refer to the relation between graphical forms as shown in FIGS. 8B

and 9B.

If density noise occurs due to diffused reflection on a solder leveler, for example, two images patterns with different nonuniform densities of a pattern image and a corresponding input image may cause lowered
 5 similarity of the density distribution therebetween, resulting in unsuccessful pattern matching.

Then, in order to smooth noise of the foreground and background of the pattern image, average densities of the foreground and background of the pattern image are set in
 10 connection with the density distribution, respectively. A density distribution function using the average densities takes a higher constant value in the domain of the foreground, and a lower constant value in the domain of the background, providing a function of plateau-like or rectangular section form as shown in 8B. This
 15 function is suitable for models of fiducial marks and lands having regular shape, constant surface properties, and uniform density in nature.

Alternatively, the density distribution function may take a lower constant value in the domain of the foreground, and a higher
 20 constant value in the domain of the background to provide inverted density distribution form.

With the use of the plateau-like function, product sum calculation of pixel values of a pattern image and a corresponding input image upon calculation of the normalized correlation coefficient
 25 C_r can be reduced to summation of pixel values of the input image, achieving also smoothed and averaged noise of the input image. That is, implementation of pattern matching with noise smoothed contributes to a great improvement in the detection ability of pattern matching with high noise resistance.

30 Referring to FIG. 1, in illustrative embodiments of the

present invention, a system comprises a lighting unit 1 for lighting an object to be recognized or detected, an image capture device 2, such as camera, for taking images such as pattern image and object to be recognized such as fiducial mark, a first storage unit or image memory 3 for taking in the images, a second storage unit or hard disk 31 for storing the images held in the first storage unit 3, a central processing unit (CPU) 4 for carrying out pattern matching processing with the images in accordance with a computer program, and a display 5 for displaying the images.

Referring to FIGS. 2-4, there are shown registration processing for a pattern image of an object of regular pattern, registration processing for a pattern image of an object of arbitrary shape pattern, and pattern matching processing between a pattern image and a corresponding input image, respectively.

Referring to FIG. 2, when an object to be recognized is of the regular pattern, an original image of the object is displayed (S1). A corresponding regular pattern is selected from a previously stored list of regular patterns comprising square, rectangle, circle, oval, rhombus, polygon, etc., and the size of which is designated (S2). Designation of the size is carried out by designating a representative point of the regular pattern or by setting a size parameter. For example, when the regular pattern is a circle, the center and a circumferential point may be designated, while when the regular pattern is of the complex shape, a polygon may be used.

Then, an image of the selected regular pattern is overlaid on the original image of the object to confirm shape conformity therebetween (S3), and the foreground and background of the pattern image are separated from each other (S4). For the density of the foreground and background, there is a need to set an average density of each (S5, S6). The average density of the foreground is

obtained, as a default, by averaging the density of the inside of the pattern image overlaid on the original image. The average density of the background is obtained by averaging the density of the outside of the pattern image. Optionally, the density of the foreground and background of the pattern image may be changed. Subsequently, an autocorrelation coefficient of the pattern image is calculated to use in calculation of the normalized correlation coefficient C_r (S7).

Referring to FIG. 3, when an object to be recognized is of the arbitrary shape pattern, i.e. of the shape which is not given on the previously stored list, registration processing is fundamentally the same as that shown in FIG. 2 except processing carried out at steps S12 and S13. Specifically, at the step S12, a histogram of an original image of the object is displayed. The histogram provides a distribution of brightness (1-256) of pixels of the original image. On the original image, the foreground has a peak in a lighter area of the distribution of brightness, whereas the background has a peak in a darker area of the distribution of brightness. And at the step S13, the outline of the original image is obtained by separating the foreground from the background according to a binarization method resulting from setting of a threshold of the brightness of the original image, or by extracting the outline in accordance with first-order and second-order differentiations.

Referring to FIG. 4, after calculating the autocorrelation coefficient of the pattern image (S7; S18), a search frame is set for the input image (S22), and the input image enclosed in the search frame is scanned by the pattern image to detect the foreground (S23). In the process of scanning, calculation is made to obtain an autocorrelation coefficient of the input image corresponding to the pattern image (S24). And calculation is made to obtain a sum of density values of the input image corresponding to the foreground

area of the pattern image (S25), and to obtain a sum of density values of the input image corresponding to the background area of the pattern image (S26).

Then, calculation is made to obtain a cross-correlation coefficient between the pattern image and the input image (S27). The normalized correlation coefficient C_r is calculated by dividing the cross-correlation coefficient by the product of the autocorrelation coefficient of the pattern image and that of the input image.

Generally, the cross-correlation coefficient is obtained by product sum calculation of pixel values of the pattern image and the input image. In this case, because of being given by the rectangular-section function, the density distribution of the pattern image has constant values in the domains of the foreground and the background, only need is summation of pixel values of the input image.

A reduction of product sum calculation of pixel values of the pattern image and the input image to summation of pixel values of the input image contributes to not only smoothed noise as described above, but largely shortened calculation time. Particularly, a reduction in time for calculation of the cross-correlation coefficient which is repeatedly carried out in the process of scanning results in a large reduction in processing time for pattern matching.

When scanning is finished (S29), selection is made to obtain a maximum value of the normalized correlation coefficient C_r and a position of the pattern image (S30). It is noted that the position of the pattern image corresponds to a pattern detected position.

Generally, calculation of the normalized correlation coefficient C_r is depicted in "Digital Picture Processing" by Azriel Rosenfeld & Avinash C. Kak, pages 306-312, published by Kindai Kagaku Sha in 1992, the teachings of which are incorporated hereby

by reference. The following is an example of a movement normalized correlation with no average values subtracted. The normalized correlation coefficient Cr is expressed by an equation (1):

$$Cr = \int_{S_p} f \cdot t dS / (\int_{S_p} f^2 dS \cdot \int_{S_p} t^2 dS)^{1/2} \quad \dots (1)$$

where S is a domain of definition of the integral, f is a density distribution function of an input image, and t is a density distribution function of the pattern image, and where $\int_{S_p} f \cdot t dS$ is a cross-correlation coefficient between the input image and the pattern image, $\int_{S_p} f^2 dS$ is an autocorrelation coefficient of the input image, and $\int_{S_p} t^2 dS$ is an autocorrelation coefficient of the pattern image and is constant.

As for a domain of definition Sp in the pattern image given in the equation (1), refer to FIG. 8B.

Using equations (2)-(4), the normalized correlation coefficient Cr can be expressed by an equation (5):

$$\|fz - t\|^2 = \int (fz - t)^2 dS = (\int f^2 dS)z^2 - 2(\int f \cdot t dS)z + \int t^2 dS \geq 0 \quad \dots (2)$$

where z is a variable.

$$\text{Discrimination function } D = (\int f \cdot t dS)^2 - \int f^2 dS \cdot \int t^2 dS \leq 1 \quad \dots (3)$$

$$\therefore (\int f \cdot t dS)^2 \leq \int f^2 dS \cdot \int t^2 dS \quad \dots (4)$$

where equality is obtained when $fz - t = 0$.

Normalized correlation coefficient

$$Cr = \int f \cdot t dS / (\int f^2 dS \cdot \int t^2 dS)^{1/2} \leq 1 \quad \dots (5)$$

where equality is obtained when $t = fz$ ($t \propto f$, i.e. t is similar to f).

As seen from the equation (5) when equality is obtained, if the density distribution function t of a pattern image is similar to that of an input image, i.e. $t \propto f$, the normalized correlation coefficient Cr is equal to 1 (maximum). It is thus desirable that the density distribution function t of a pattern image is similar to average values of density distribution of the foreground and background of an input image. Therefore, referring to FIG. 8B, the density distribution function t of a pattern image is set to average values t_F, t_B of density distribution of the foreground and background of an original image of the pattern image.

Thus, the cross-correlation coefficient between the input image and the pattern image in the equation (1) can be transformed into an equation (6):

$$\int_{\Omega} f \cdot t dS = \int_{\Omega_F} f \cdot t dS + \int_{\Omega_B} f \cdot t dS = \bar{t}_F \int_{\Omega_F} f dS + \bar{t}_B \int_{\Omega_B} f dS \quad \dots (6)$$

where \bar{t}_F and \bar{t}_B are constant.

As seen from the equation (6), the cross-correlation coefficient discretized to product sum calculation becomes the integral of the density distribution function f of the input image discretized to summation, achieving smoothed noise, allowing pattern matching without being affected by noise.

Discretization of the equation (6) by pixels provides an equation (7):

$$\sum_{i=1}^N f_i \cdot t_i = \bar{t}_F \sum_{i \in B} f_i + \bar{t}_B \sum_{i \in \bar{B}} f_i \quad \dots \quad (7)$$

5

As seen from the equation (7), product sum calculation of the density distribution functions f , t of the input image and the pattern image can be reduced to summation thereof, resulting in high-speed calculation.

10

Likewise, product sum calculation of the normalized correlation coefficient Cr with average values subtracted can be reduced to summation, obtaining the same effect.

15

As described above, an essential factor for increasing the detection ability of pattern matching comprises registration of pattern images. The shape of a pattern image as well as the density distribution of the foreground and background thereof is the key for increasing conformity of pattern matching between a pattern image and a corresponding input image.

20

According to the equation of definition of the normalized correlation coefficient Cr , achievement of high conformity ($Cr \approx 1$) requires that the shape of the foreground of a pattern image is substantially equal to that of the foreground of a corresponding input image, and that the density distribution of the pattern image is similar to that of the input image.

25

The background of printed circuit boards may have various disturbances such as wiring layout pattern, silk-white circuit sign, partial dirt, resist, flux, etc., so that during pattern matching of regular lands, solders, mounted parts and lot numbers, non-matching occurs in the background of a pattern image and a corresponding input

image. Thus, conformity is lowered as a whole to reduce a normalized correlation coefficient value, resulting in unsuccessful pattern matching.

In order to reduce a bad influence of disturbances, with the foreground and background of a pattern image being separated to remove the background, pattern matching is carried out, preferably, with regard to the foreground only. For this purpose, the density distributions of the foreground and background of the pattern image are separated at a stage of registration thereof.

In other illustrative embodiments of the present invention, recognition is carried out using the system as shown in FIG. 1. Referring to FIGS. 5-7, there are shown registration processing for a pattern image of an object of regular pattern such as regular land, solder, mounted part or the like, registration processing for a pattern image of an object of arbitrary shape pattern or characters, and pattern-matching processing between a pattern image and a corresponding input image, respectively.

Referring to FIGS. 5-6, registration processing is substantially the same as that as shown in FIGS. 2-3. First, an original image of an object to be recognized is displayed (S41; S51). When the object is of the regular pattern, a corresponding regular pattern is selected from a previously stored list of regular patterns comprising square, rectangle, circle, oval, rhombus, polygon, etc. By designating the size of the regular pattern and the density of the inside and outside thereof (S42), the foreground and background of a pattern image are separated from each other (S44). When the object is of the arbitrary shape pattern, by means of outline separation (S53), the foreground and background of a pattern image are separated from each other (S55).

In order to obtain smoothed noise and high-speed

calculation of a correlation coefficient, an average density of an original image is designated with regard to the foreground and background thereof (S45, S46; S56, S57). Alternatively, due to background information excluded, the density may be designated such that the foreground is 1, and the background is 0. Optionally, it is possible to use the density distribution of an original image or the density distribution defined by a user.

Subsequently, an autocorrelation coefficient of the pattern image is calculated to use in calculation of the normalized correlation coefficient C_r (S47; S58). Since pattern matching is carried out with regard to only the foreground of the pattern image with the background excluded, an autocorrelation coefficient of the pattern image is calculated with regard to the foreground only, i.e. the foreground area of the pattern image (S47; S58).

This forms a mask for the background of the pattern image. Unlike a fixed mask for a particular portion of an input image, this mask is a kind of automatic mask which allows pattern matching with regard to only the foreground with the background masked during scanning of an input image enclosed in a search frame by a pattern image.

Referring to FIG. 7, after calculating the autocorrelation coefficient of the pattern image (S47; S58), a search frame is set for the input image (S62), and the input image enclosed in the search frame is scanned by the pattern image to detect the foreground (S63). In the process of scanning, calculation is made to obtain an autocorrelation coefficient of the input image corresponding to the foreground area of the pattern image (S64). And calculation is made to obtain a sum of density values of the input image corresponding to the foreground area of the pattern image (S65).

Then, calculation is made to obtain a cross-correlation

coefficient between the foreground area of the pattern image and the input image (S66). The normalized correlation coefficient Cr is calculated by dividing the cross-correlation coefficient by the product of the autocorrelation coefficient of the pattern image and that of the input image. Due to the background removed from the pattern image, pattern matching is ensured with bad influence of disturbances on the background minimized, resulting in shortened calculation time.

When scanning is finished (S68), selection is made to obtain a maximum value of the normalized correlation coefficient Cr and a position of the pattern image (S69). It is noted that the position of the pattern image corresponds to a pattern detected position.

Referring to FIGS. 10-11, in the embodiments, as being carried out with regard to a pattern image with the background excluded or masked as shown in FIG. 10, pattern matching is less influenced by shading placed on the background of the input image as shown in FIG. 11.

The normalized correlation coefficient Cr is expressed by the above equation (1). Since the density distributions of the foreground and background of the pattern image have constant average values, respectively, the cross-correlation coefficient is expressed by an equation (8):

$$\int_{sp} f \cdot t dS = \bar{t}_F \int_{sp} f dS + \bar{t}_B \int_{sp} f dS \quad \dots (8)$$

25 Foreground Background (ignored)

Due to the background removed from a pattern image, a term of the background is ignored in the equation (8).

The autocorrelation coefficients are expressed by equations

(9) and (10), respectively:

$$\int_p f^2 dS = \int_{SF} f^2 dS + \int_{SB} f^2 dS \quad \dots (9)$$

Foreground Background (ignored)
(Variant)

5

$$\int_{Sp} \bar{t}^2 dS = \bar{t}_F^2 S_F + \bar{t}_B^2 S_B = const \quad \dots (10)$$

Foreground Background (ignored)

10 A term of the background is ignored in each equation (9) and (10).

 Thus, the normalized correlation coefficient Cr can be expressed by an equation (11) including only a term of the foreground with a term of the background excluded, allowing
15 restrained bad influence of disturbances on the background and fast pattern-matching processing.

$$Cr = \bar{t}_F \int_{Sp} f dS / (\int_{Sp} f^2 dS \cdot \bar{t}_F^2 S_F)^{1/2} = \int_{SF} f dS / (\int_{SF} f^2 dS \cdot S_F)^{1/2} \rightarrow \max \quad \dots (11)$$

20

 Likewise, the equation of the normalized correlation coefficient Cr with average values subtracted can be reduced to the equation including only a term of the foreground with a term of the background excluded, obtaining the same effect.

25 The inventive method allows real time pattern matching by means of processing in the CPU in a software way without using an exclusive fast image processing board, contributing to simplified apparatus structure and reduced manufacturing cost. Of course,

the inventive method can be recorded as a computer program on readable recording media such as floppy disk and CD-ROM for various applications.

Having described the present invention in connection with
5 the preferred embodiments, it is noted that the present invention is not limited thereto, and various changes and modifications can be made without departing from the scope of the present invention.

The entire contents of Japanese Patent Application P9-354322 are incorporated hereby by reference.

10

00/00/00 00:00:00

WHAT IS CLAIMED IS:

1. A method of recognizing an object based on pattern matching using a gray-scale normalized correlation method, comprising the steps of:

5 storing a reference image including a foreground and a background, said foreground and said background each having a predetermined value of density distribution;

inputting an image of the object, said image including a foreground and a background, said foreground and said background
10 each having a predetermined average value of density distribution;

storing a function for giving said predetermined values of density distribution of said reference image equal to said predetermined average values of density distribution of said input image, respectively; and

15 obtaining a maximum normalized correlation coefficient between said reference image and said input image using said function.

2. The method as claimed in claim 1, wherein said function is
20 such that said reference image is high in said predetermined value of density distribution of said foreground, and low in said predetermined value of density distribution of said background.

3. The method as claimed in claim 1, wherein said function is
25 such that said reference image is low in said predetermined value of density distribution of said foreground, and high in said predetermined value of density distribution of said background.

4. The method as claimed in claim 2, wherein said function is
30 obtained by designating a pattern of said reference image,

5

10

15

20

25

30

Page 24

8. The method as claimed in claim 7, wherein said function is obtained by designating a pattern of said reference image, overlaying an image of said pattern on said input image, and designating one of a predetermined average value of density distribution of said image and a predetermined value of density of said image.

9. The method as claimed in claim 7, wherein said function is obtained by extracting an outline of the object, overlaying an image of said outline on said input image, and designating one of a predetermined average value of density distribution of said image and a predetermined value of density of said image.

10. The method as claimed in claim 7, wherein said maximum normalized correlation coefficient is calculated in excluding a term of a background of said reference image from an equation of an autocorrelation coefficient of each of said reference image and said input image and an equation of a cross-correlation coefficient between said reference image and said input image.

11. The method as claimed in claim 7, wherein said maximum normalized correlation coefficient is obtained from simple summation of said cross-correlation coefficient.

12. A medium for recording a computer program having a method of recognizing an object based on pattern matching using a gray-scale normalized correlation method, the method comprising the steps of:

storing a reference image including a foreground and a

background, said foreground and said background each having a predetermined value of density distribution;

inputting an image of the object, said image including a foreground and a background, said foreground and said background
5 each having a predetermined average value of density distribution;

storing a function for giving said predetermined values of density distribution of said reference image equal to said predetermined average values of density distribution of said input image, respectively; and

10 obtaining a maximum normalized correlation coefficient between said reference image and said input image using said function.

13. A medium for recording a computer program having a method of recognizing an object based on pattern matching using a
15 gray-scale normalized correlation method, comprising the steps of:

storing a reference image including a foreground, said foreground having a predetermined value of density distribution;

inputting an image of the object, said image including a foreground, said foreground having a predetermined average value
20 of density distribution;

storing a function for giving said predetermined value of density distribution of said reference image equal to said predetermined average value of density distribution of said input
25 image; and

obtaining a maximum normalized correlation coefficient between said reference image and said input image using said function.

A method of recognizing an object based on pattern matching using a gray-scale normalized correlation method includes storing a reference image including a foreground and a background each having a predetermined value of density distribution; inputting an image of the object which includes a foreground and a background each having a predetermined average value of density distribution; storing a function for giving the predetermined values of density distribution of the reference image equal to the predetermined average values of density distribution of the input image, respectively; and obtaining a maximum normalized correlation coefficient between the reference image and the input image using the function.

FIG.1

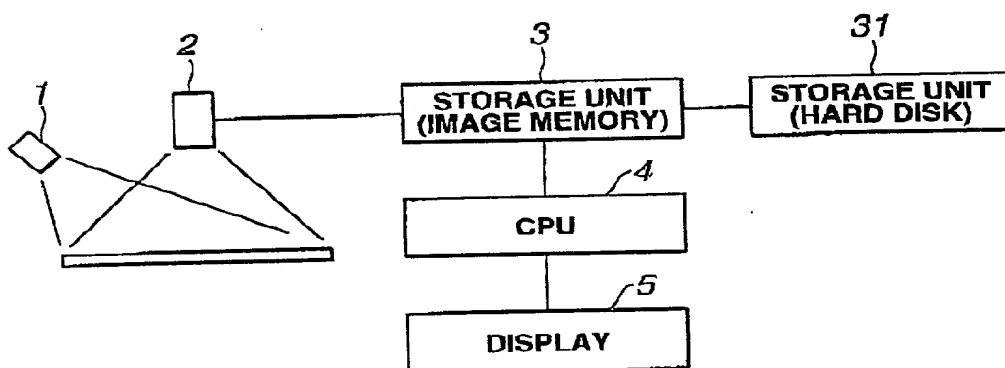


FIG.2

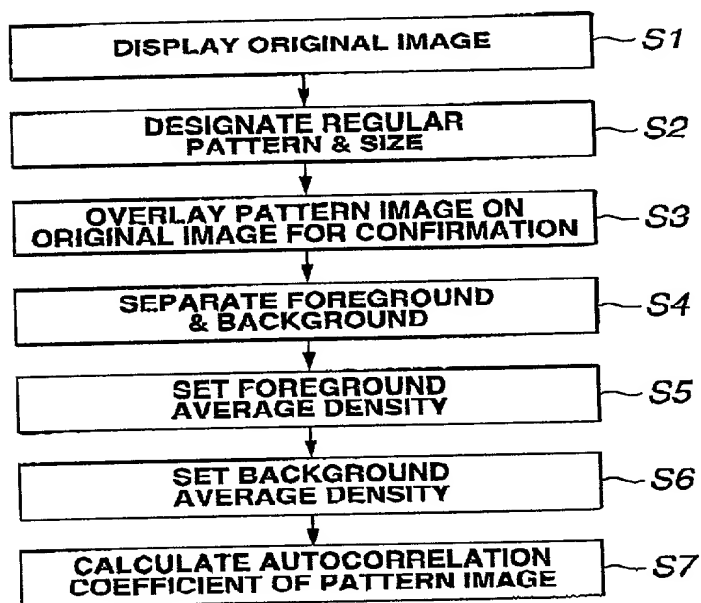


FIG.3

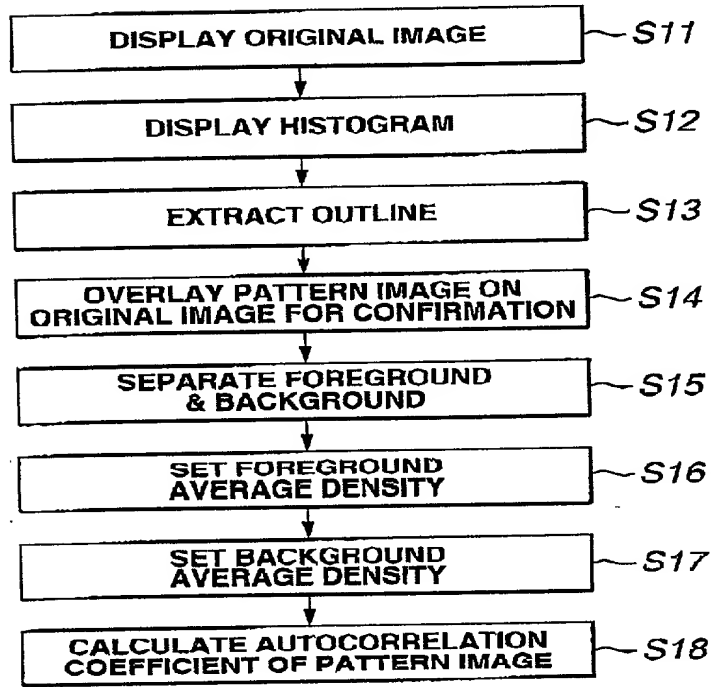


FIG.4

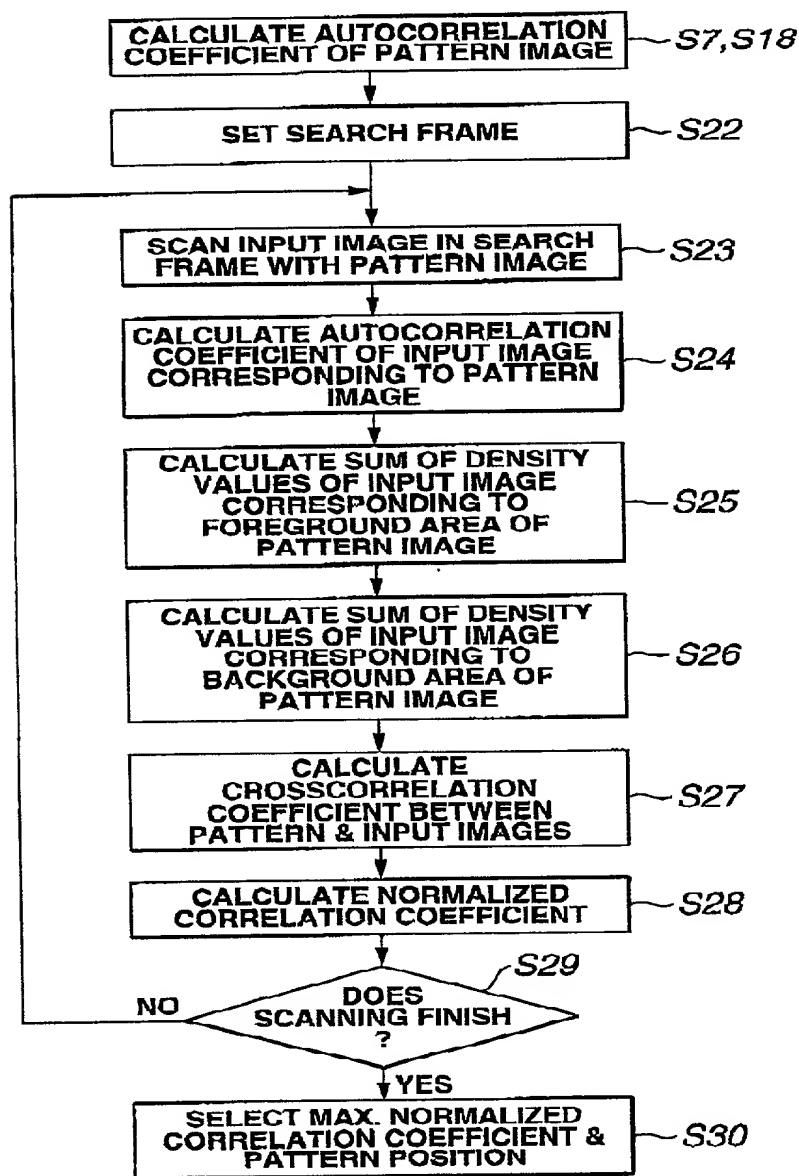


FIG.5

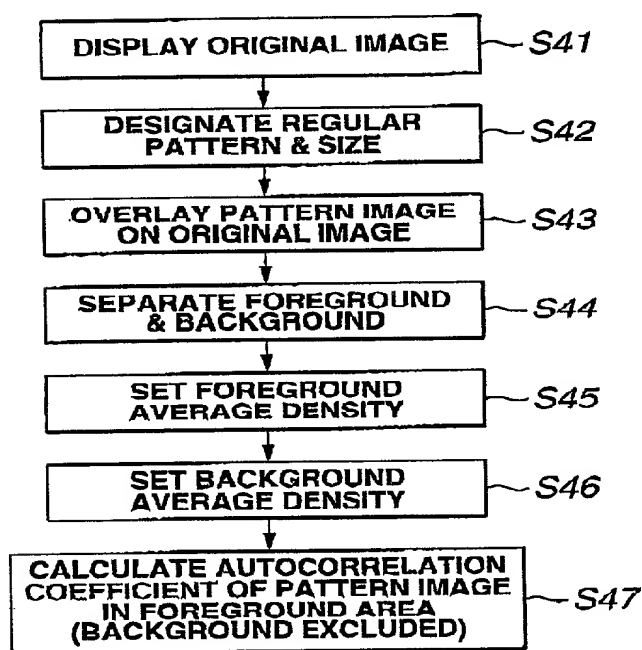


FIG.6

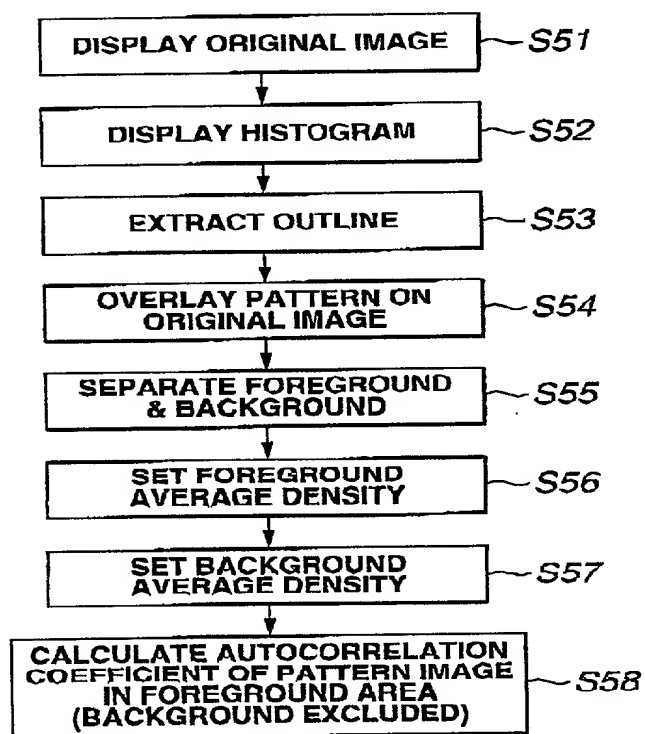


FIG.7

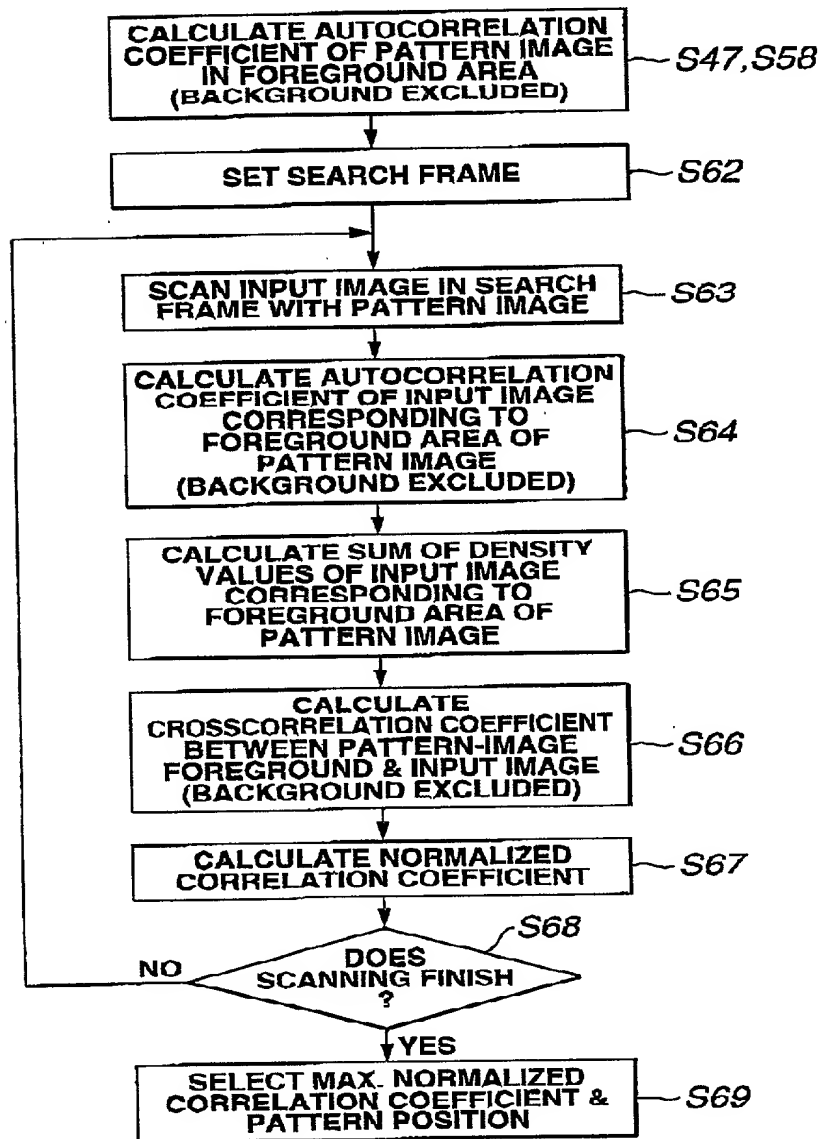


FIG.8A

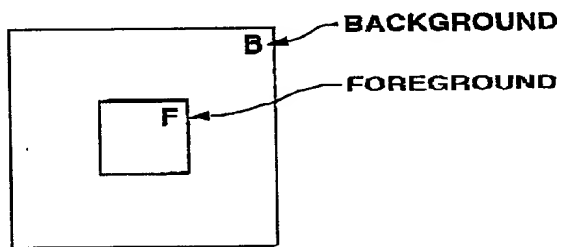


FIG.8B

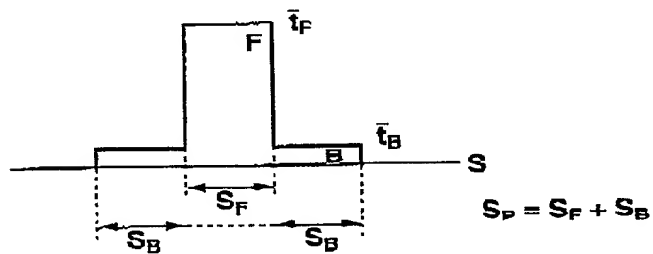


FIG.9A

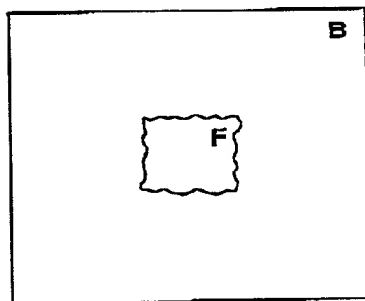


FIG.9B

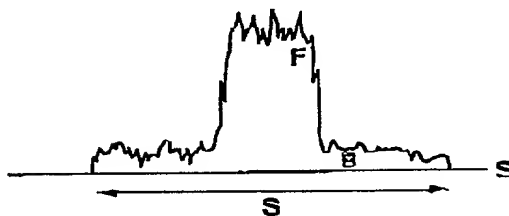


FIG. 10

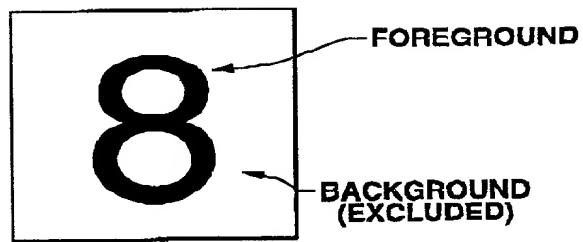


FIG.11
(PRIOR ART)


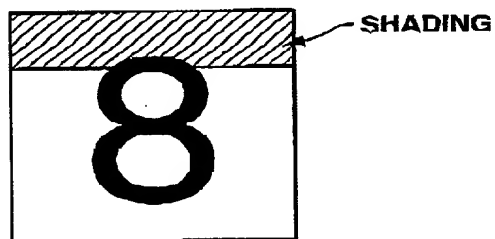


FIG. 12
(PRIOR ART)

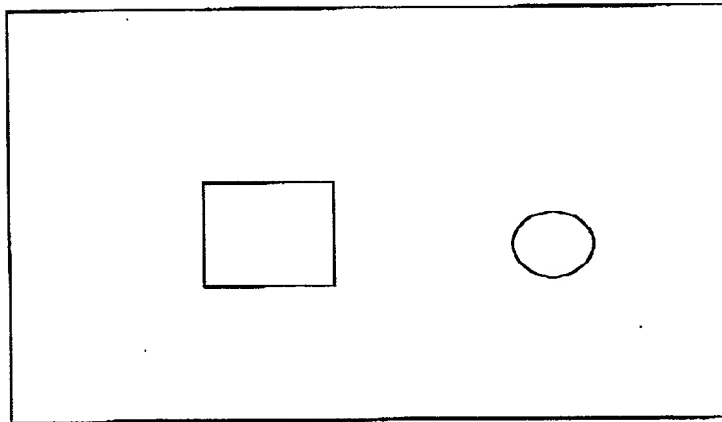

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD OF RECOGNIZING OBJECT BASED ON PATTERN MATCHING AND MEDIUM FOR RECORDING COMPUTER PROGRAM HAVING SAME

(Attorney Docket No. 040679/1099)

the specification of which (check one)

_____ is attached hereto.

 X was filed on July 7, 2000 as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code §119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?
9-354322	Japan	December 24, 1997	No	

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, §120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith:

STEPHEN A. BENT	Reg. No. 29,768
DAVID A. BLUMENTHAL	Reg. No. 26,257
BETH A. BURROUS	Reg. No. 35,087
ALAN I. CANTOR	Reg. No. 28,163
WILLIAM T. ELLIS	Reg. No. 26,874
JOHN J. FELDHAUS	Reg. No. 28,822
PATRICIA D. GRANADOS	Reg. No. 33,683

JOHN P. ISACSON	Reg. No. 33,715
MICHAEL D. KAMINSKI	Reg. No. 32,904
LYLE K. KIMMS	Reg. No. 34,079
KENNETH E. KROSIN	Reg. No. 25,735
JOHNNY A. KUMAR	Reg. No. 34,649
GLENN LAW	Reg. No. 34,371
PETER G. MACK	Reg. No. 26,001
BRIAN J. MC NAMARA	Reg. No. 32,789
SYBIL MELOY	Reg. No. 22,749
RICHARD C. PEET	Reg. No. 35,792
GEORGE E. QUILLIN	Reg. No. 32,792
COLIN G. SANDERCOCK	Reg. No. 31,298
BERNHARD D. SAXE	Reg. No. 28,665
CHARLES F. SCHILL	Reg. No. 27,590
RICHARD L. SCHWAAB	Reg. No. 25,479
ARTHUR SCHWARTZ	Reg. No. 22,115
HAROLD C. WEGNER	Reg. No. 25,258

and I request that all correspondence be directed to:

Richard L. Schwaab
 FOLEY & LARDNER
 Washington Harbour
 3000 K Street, N.W., Suite 500
 Washington, D.C. 20007-5109

Telephone: (202) 672-5414
 Facsimile: (202) 672-5399

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of first inventor	Hiromi SHIKATA
Residence	Chiba, Japan
Citizenship	Japan
Post Office Address	c/o TANI ELECTRONICS INDUSTRY CO., LTD. 10-3, Miyoshi 3-chome, Koto-ku, Tokyo 135-0022, Japan
Inventor's signature	
Date	